


# Wall mounted inlet

Part number: 75398

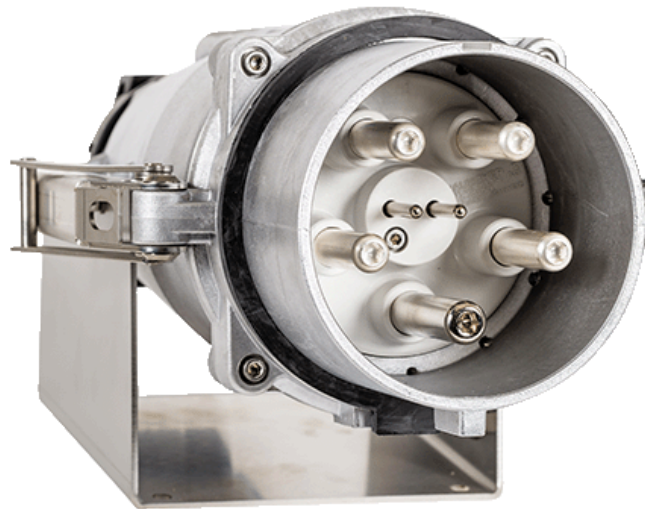

**MENNEKES**  
Elektrotechnik GmbH & Co. KG

Aloys-Mennekes-Straße 1  
57399 Kirchhundem  
GERMANY

[www.MENNEKES.org](http://www.MENNEKES.org)

## Product Description

- highly heat resistant contact carrier, silver plated contacts
- external fixing
- 10° inclination
- MetalLine
- aluminium enclosure
- seawater resistant products are available on request

## Technical Details

Wall mounted inlet	75398
Ampere	400A
Number of poles	5p
Clock position	6h
Nominal voltage AC	400V
Nominal frequency	50 - 60 Hz
Protection type IP	IP67
Contact carrier	highly heat resistant contact carrier, silver plated contacts
Connection	cage terminals
Tightening torque connection terminal	allen key
Phase inverter	without phase inverter
Pilot contact	2 pilot contacts
Blind cable entry at the rear	no
Enclosure base can be turned 180°	no
Insertion direction	angled
Inclination	10°
Type of mounting	external fixing
Military version	no
Protection cap	without protection cap
Tightening torque connection terminal	16 Nm
Recommended wire end treatment for supply cable connection terminal	usable with and without ferrule
Strip length jacket	200 mm
Strip length conductor	60 mm
Conductor cross-section min.	70 mm <sup>2</sup>

<b>Wall mounted inlet</b>	<b>75398</b>
Conductor cross-section max.	240 mm <sup>2</sup>
Conductor cross-section pilot max.	4 mm <sup>2</sup>
Weight (net)	8960 g
Packaging unit	1 Stück
Quantity per pallet	18 Stück
EAN / identification number	4015394152453

<b>Permissible ambient conditions</b>		
	<b>Min.</b>	<b>Max.</b>
Permanent ambient temperature	-40 °C	100 °C

<b>Material properties</b>	
Housing	aluminium grey [no RAL colour code]
External screws	bare stainless steel

**Material resistance**

The material resistance overview can be found on the website in the section “Knowledge” - “Product knowledge” - “Materials”.

<b>Material and environmental properties</b>	
RoHS 2011/65/EU incl. 2015/863/EU	✓
POP regulation (EU) 2019/1021	✓
Halogen-free	yes

<b>Regulations and Standards</b>	
Norm	DIN EN IEC 60309
Declaration of Conformity	CE
Test label	EAC

# Dimensional Drawing

Drawing  
2 MB 200/1

Dim. in mm

